

GS/P 25S4 1185X555

INTELIGENTNY SYSTEM WAŻENIA



SCALE TRUCK GS/P

The GS/P pallet truck is an intelligent and robust tool to be used for weighing and transporting your loads at the same time, making stock and dispatch processes faster, simpler and more efficient. The machine can be equipped with supplements such as printer or SD memory card and thanks to the 4 load cells it is able to be very precise and functional; ideal for checking incoming goods, avoiding overloads and determining shipping weights.



CE-M APPROVED WEIGHING

This highly accurate version of GS/P is specifically designed according to CE-M norms that ensure its suitability for weighing for trade use and is also compliant with SOLAS regulation.



DISPLAY

Its large-sized 6 digits LCD display provides accurate and precise weighing in kg and lb. Its software allows not only net/gross/tare weighing but also unit counting, adding and totalling of multiple loads. Weights are shown in 1 kg/lb steps with 0,05% precision.



FRAME STRUCTURE

The structure is designed with a double frame consisting of a lower fork on which stands a counter fork. Both forks house two load cells allowing a uniform load distribution, and keeping high weighing accuracy even in case of collision and unbalanced load.



BATTERY and BATTERY CHARGER


The GS/P is supplied complete with rechargeable battery and charger. The battery module provides 50 hours autonomy.



CONFIGURATION

STANDARD:

Nylon polyurethane steering wheels and polyurethane rollers

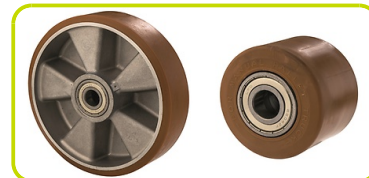

OPTIONAL:

Rubber steering wheels



PRINTER / MEMORY CARD SD (Supplement , only available at time of order)

As supplement, the machine can be equipped with a built-in printer, able to print gross, tare and net weights (kg or lb), date, quantity of pieces on the scale.



It may also be enriched with another supplement, the SD memory card, allowing you to store weighing data in a text file, for archiving and processing via PC.



Opis

1.1 Producent	LIFTER		
1.3 Napęd	Ręczne		
1.4 Typ operatora	Pieszy		
1.5 Ładowność	Q	Kg	2500
1.6 Odległość środka ciężkości	c	mm	600
1.8 Nacisk na oś do końca wideł	x	mm	975
1.9 Rozstaw osi	y	mm	1250

Waga

2.1 Waga serwisowa (z akumulatorem)	Kg	117
2.2 Nacisk na tylną oś z ładunkiem	Kg	1836
2.2 Nacisk na przednią oś z ładunkiem	Kg	781
2.3 Nacisk na przednią oś bez ładunku	Kg	71
2.3 Nacisk na tylną oś bez ładunku	Kg	46

Opony/rama

3.1 Koła sterujące	POLY.I./ NYLON	
3.1 Rolki nośne	POLY.I.	
3.2 Rozmiar kół napędowych - Szerokość	mm	55
3.2 Rozmiar kół napędowych - Średnica	mm	200
3.3 Rozmiar rolek - Średnica	mm	82
3.3 Rozmiar rolek - Szerokość	mm	60
3.5 rozmiar kół: koła tylne - ilość (X-napędzane)	nr	4
3.5 rozmiar kół: koła przednie - ilość (X-napędzane)	nr	2
3.5 Tylna oś balansująca	No	
3.6 Ślad, przód	b10 mm	155
3.7 Ślad, tył	b11 mm	375

Wymiary


4.4 Wysokość podnoszenia	h3 mm	115
4.9 Height of tiller in drive position min	h14 mm	690
4.9 Wysokość dyszla w pozycji pracy maks	h14 mm	1160
4.15 Wysokość, opuszczony	h13 mm	90
4.19 Całkowita długość	l1 mm	1596
4.20 Długość do podstawy wideł	l2 mm	411
4.21 Całkowita szerokość	b1 mm	555
4.22 Wymiary wideł - grubość	s mm	60
4.22 Wymiary wideł - Szerokość	e mm	180
4.22 Wymiary wideł - Długość	l mm	1185
4.25 Odległość pomiędzy widłami	b5 mm	555
4.32 Prześwit od ziemi, środek rozstawu osi	m2 mm	30
4.34 Szerokość korytarza roboczego	Ast mm	1851
4.35 Promień skrętu	Wa mm	1426

Osiągi

5.2 Prędkość podnoszenia z ładunkiem	strokes	13
5.2 Prędkość podnoszenia bez ładunku	strokes	13
5.3 Prędkość opuszczania z ładunkiem	m/s	0.05
5.3 Prędkość opuszczania bez ładunku	m/s	0.02

Waga

Typ	DFW 06 XPCA	
Cyfry	Q.ty	6
Wysokość cyfr	mm	25
Kilogramy		Yes
Funty		Yes
Tara		Yes
Auto-Wył		Yes
Sumowanie		Yes
Zliczanie		Yes
Czas pracy	h	50
Dokładność	%	0.05
Ilość czujników	Q.ty	4
6.4 Napięcie akumulatora	V	6
6.4 Pojemność akumulatora	Ah	4

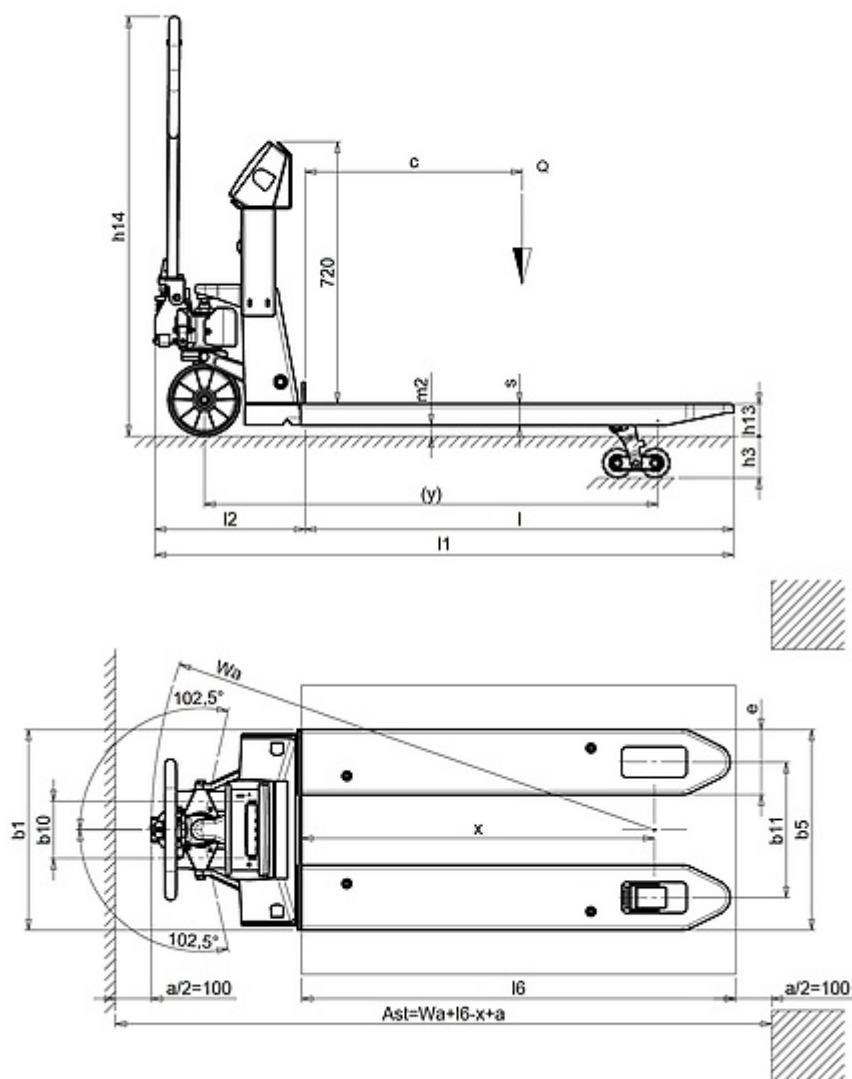

The information is aligned with the Data file at the time of download. Printed on 03/07/2018 (ID 590)

©2018 | PR INDUSTRIAL s.r.l. | All rights reserved | Image shown may not reflect actual package.
Specifications subject to change without notice